



Cable: Colorflex CY 3x0.25mm² (Shielded control cable)
 Temperature range: from -5° to +80°C

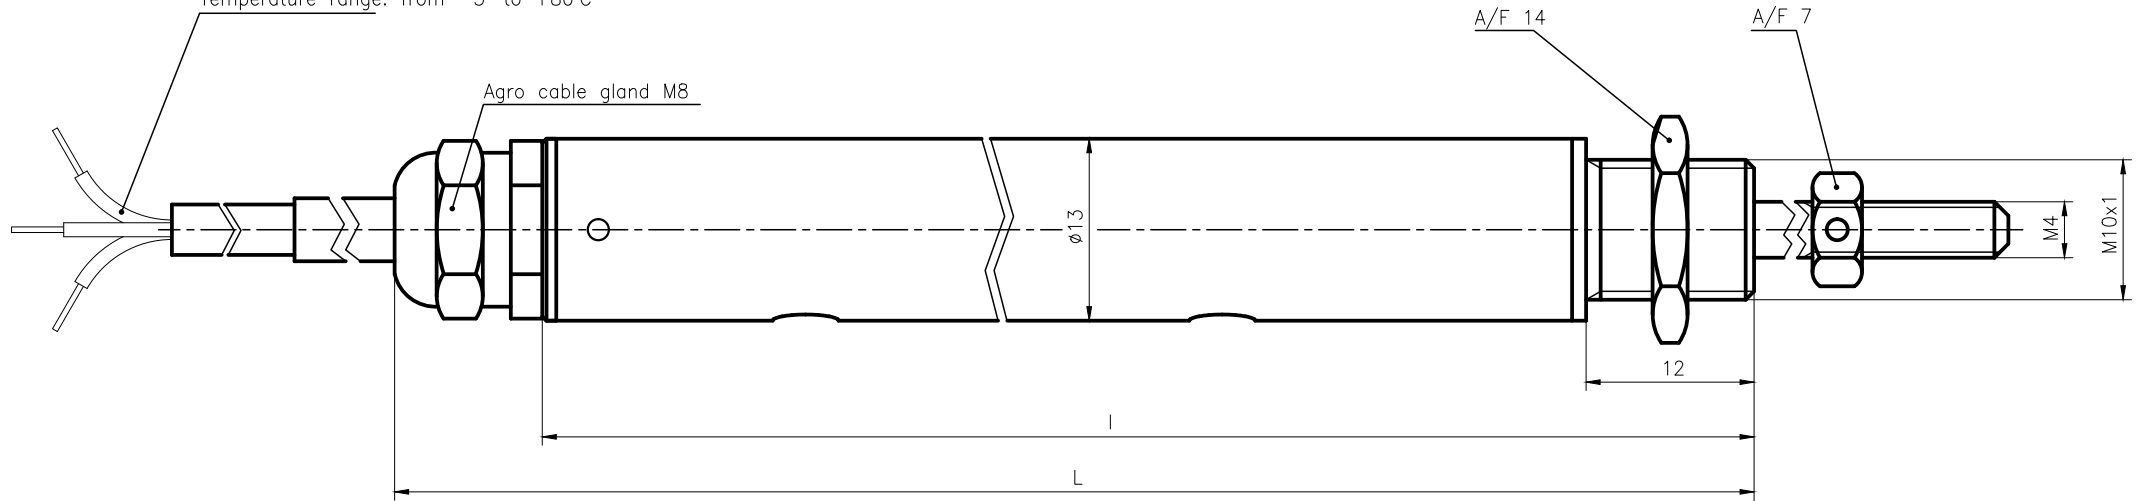

Mech. stroke	I	L		
520	584	594.5		
500	564	574.5		
450	514	524.5		
400	464	474.5		
350	414	424.5		
340	404	414.5		
335	399	409.5		
300	364	374.5		
260	324	334.5		
250	314	324.5		

235	299	309.5		
225	289	299.5		
200	264	274.5		
170	234	244.5		
160	224	234.5		
150	214	224.5		
125	189	199.5		
100	164	174.5		
75	139	149.5		
65	129	139.5		
60	124	134.5		
50	114	124.5		
30	94	104.5		
25	89	99.5		
15	79	89.5		
Mech. stroke	I	L		



Pos.	Menge	Z.Nummer:	Material:	Behandlung:
Änderungen:				13-003
a	b	c	☞	
d	e	f		
GENGE & THOMA AG CH-2543 Lengnau/Biel			Linear motion transducer HP 13...KA	
			gez.: 06.11.95 Th gepr.: 13.05.16 AG	Masstab: 2.5:1
			13-003Eb	