

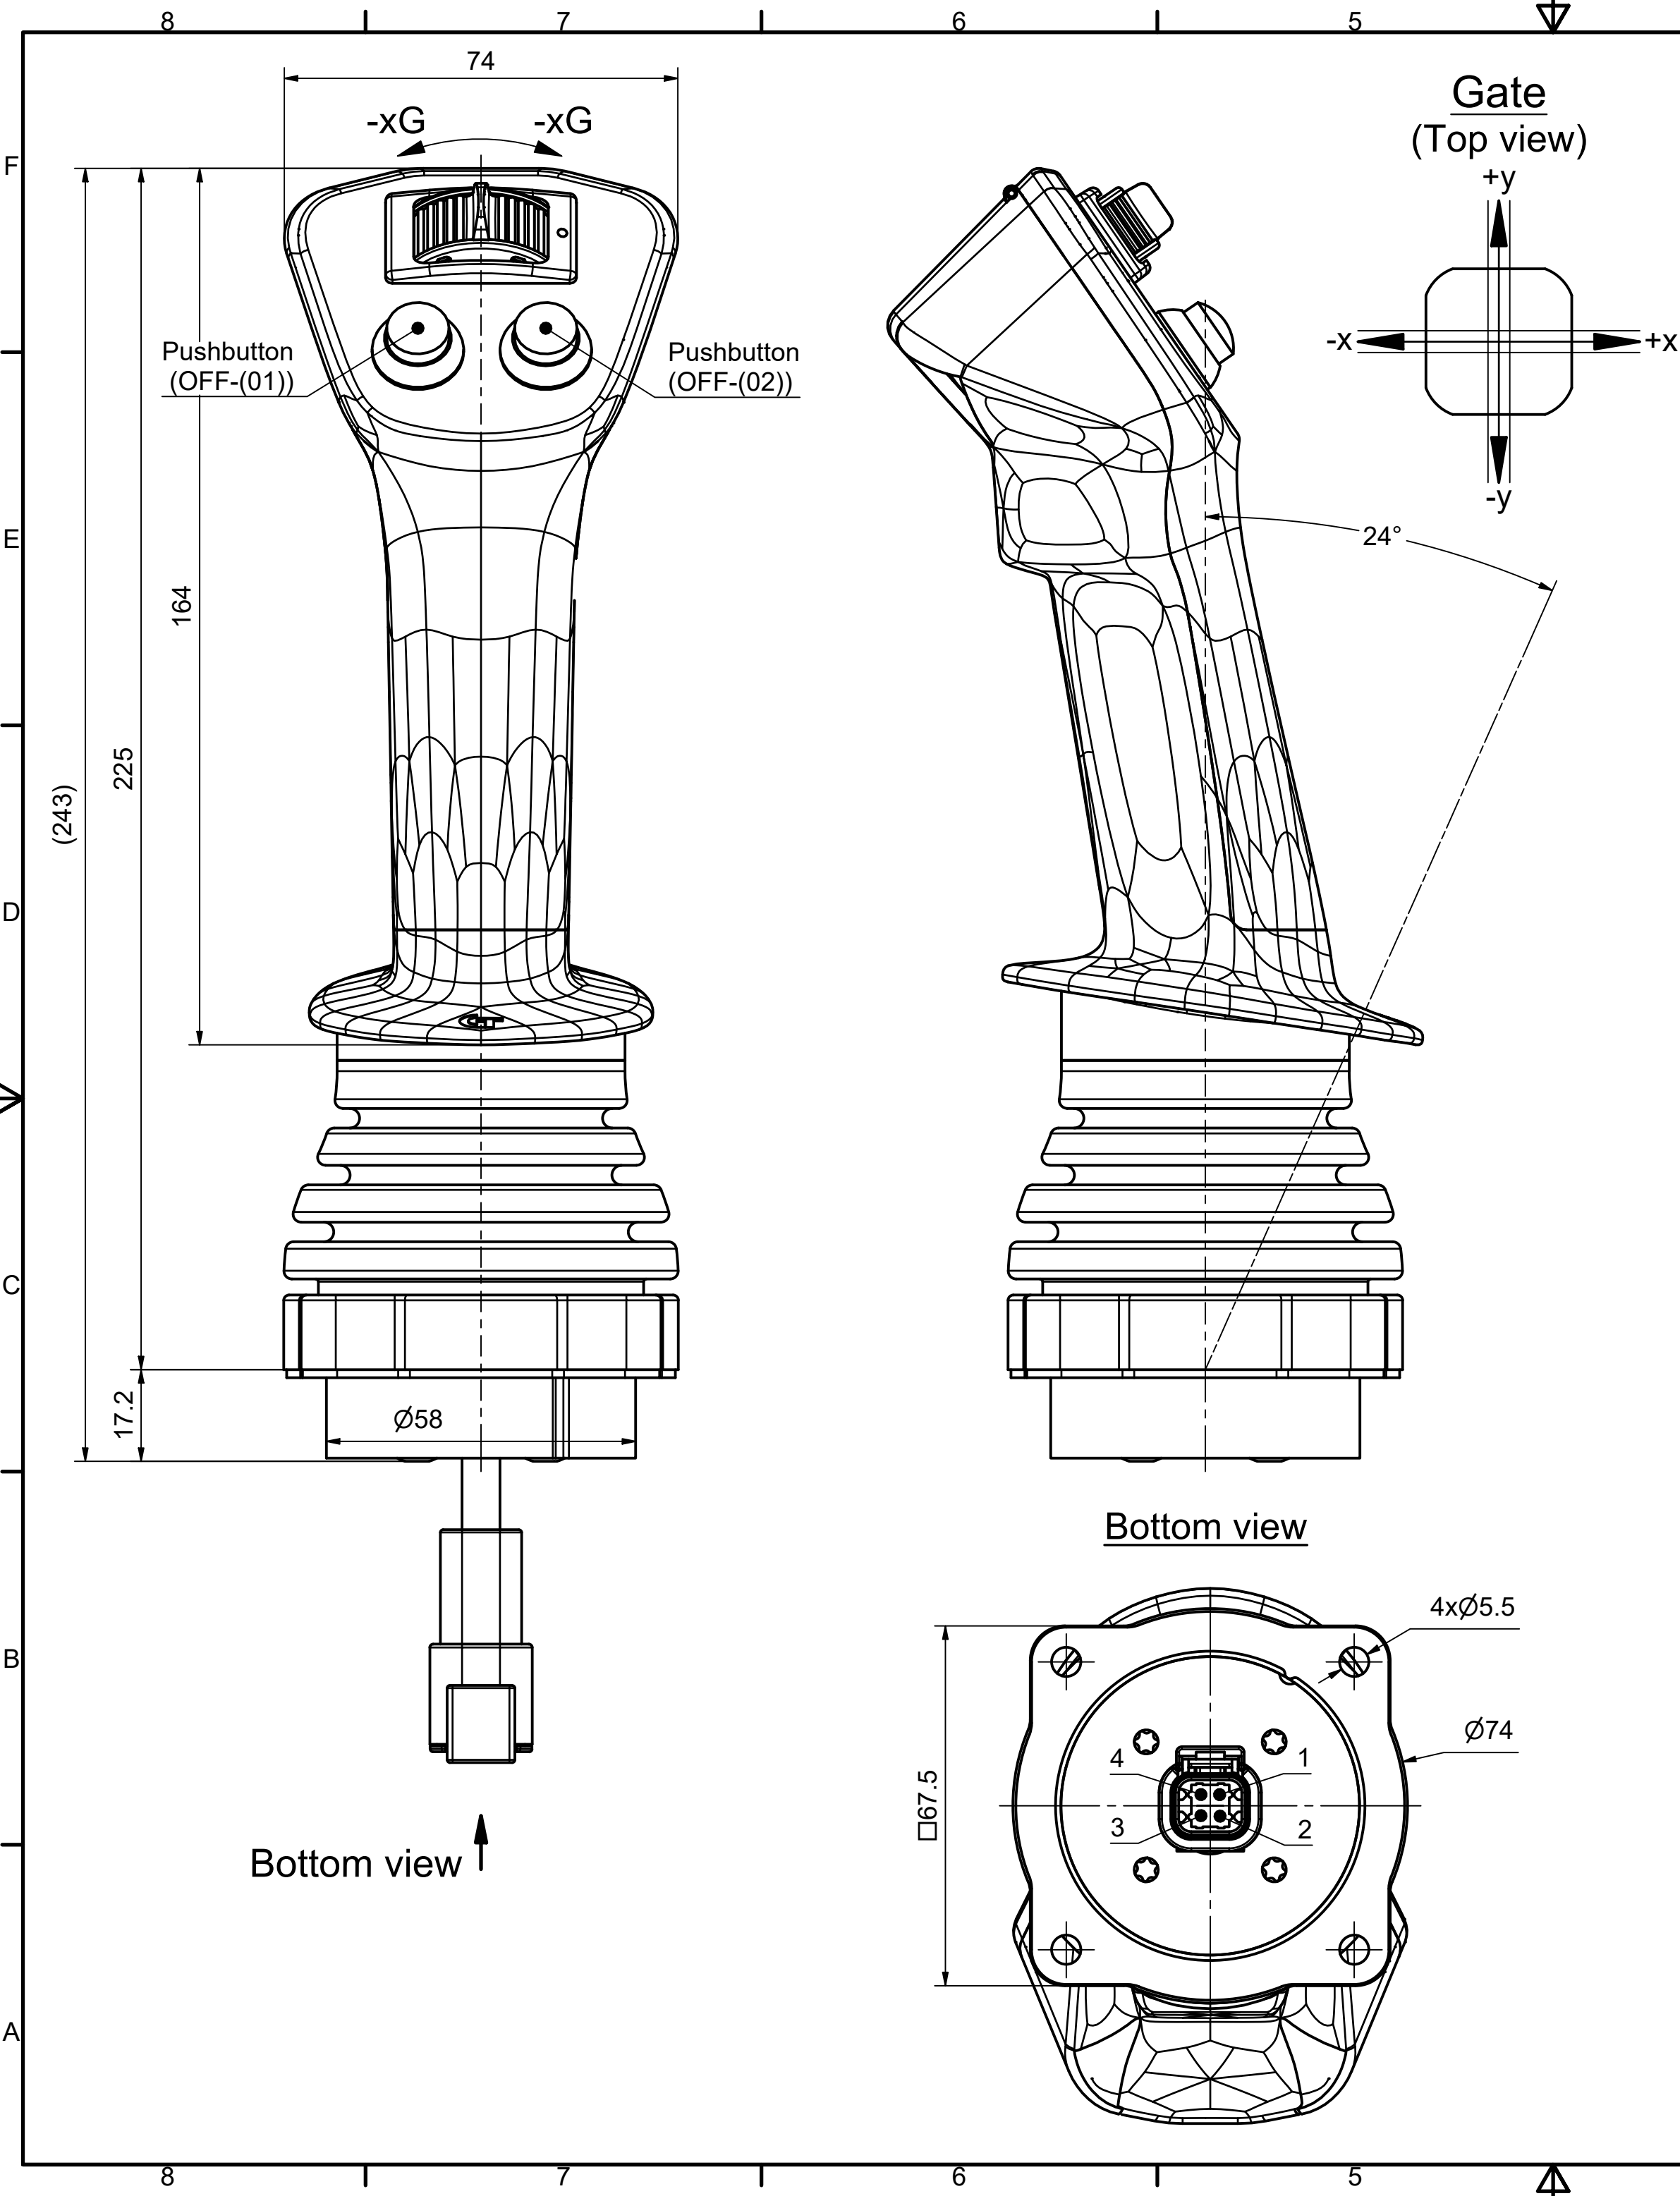


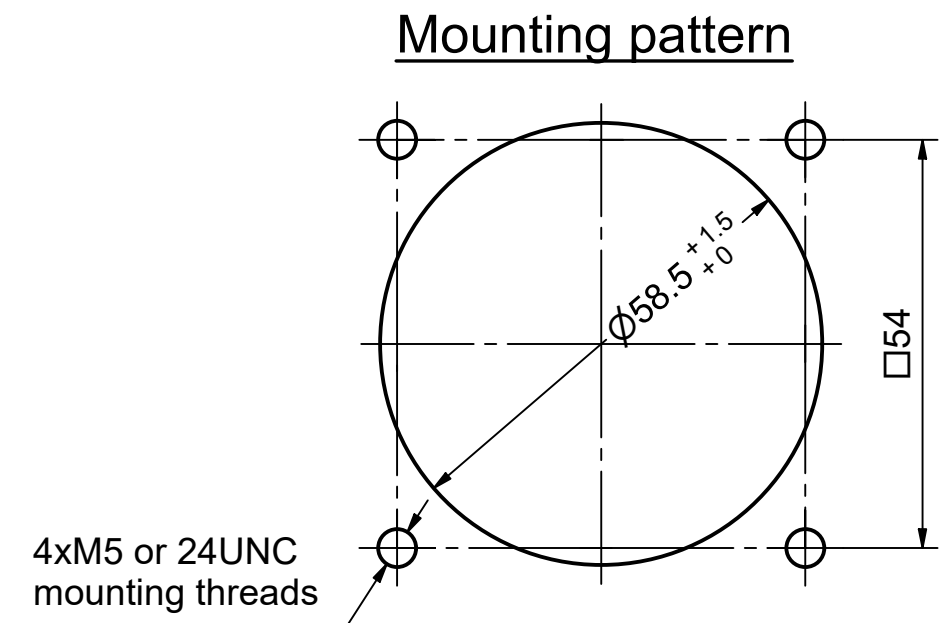

Description	
Joystick type SK 212-0105	
Number of axes	2-axes, x-, y-axis
Operation by	Multifunction handle
Cross guidance	rigid
Retaining spring	normal, P/N : 200385
Connector	Deutsch DTM04-4P (4 poles), P/N: 100604
Electrical characteristics	
Operating voltage	8-36 V DC
Sensor	Hall effect technology
Safety applications	Safety relevant applications may need specialfeatures not described in this sheet
Pin	
1	Red GND
2	Black VCC
3	Yellow CAN_H
4	Green CAN_L
Parameters	
Data communication	CANopen
CAN ID	1
Baudrate	250 kbit/s

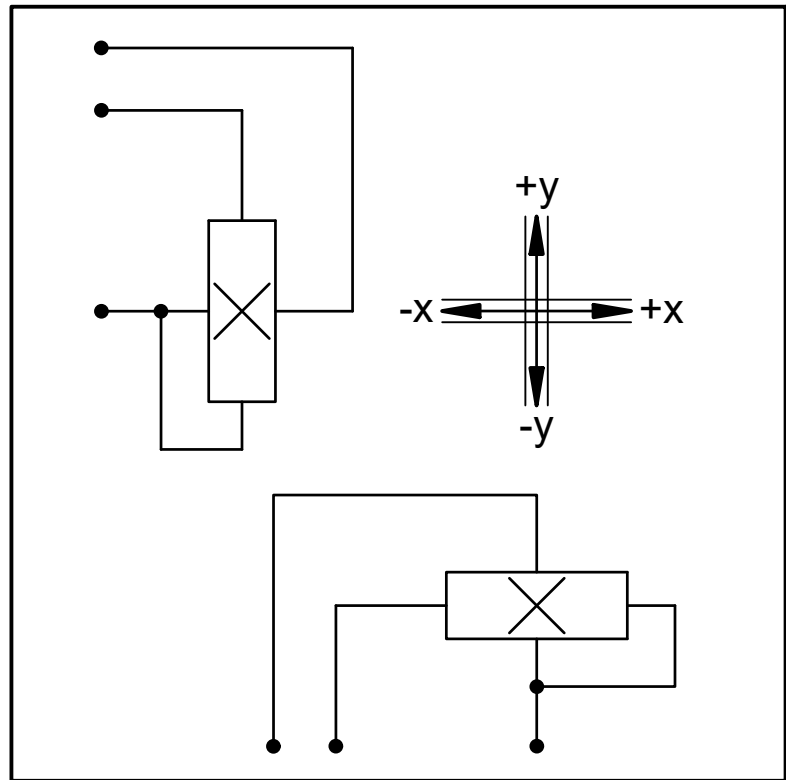

The numbers next to the components are equal to the value in the CAN message

Preliminary		Oberfläche:		Massstab: 1:1	Position:	Menge:
09.10.23						
		Datum	Name	Joystick		
		Bearb.	09.10.23			
		Geprü.	Kiener M.			
		joysticks + sensors				Blatt
		Erlenstrasse 32				1
		CH-2555 Brugg				1
		Switzerland				Bl
		+41 32 852 33 30				
		info@gtjoysticks.ch				
		www.gtjoysticks.ch				
Idx	Änderungen	Datum	B'arb	Geprü.	S:\Entwicklung\01_CAD-Daten\01_AIDATA-GT\1_1_Joysticks\SK212\Zusammenstellungen\212-0105.idw	