


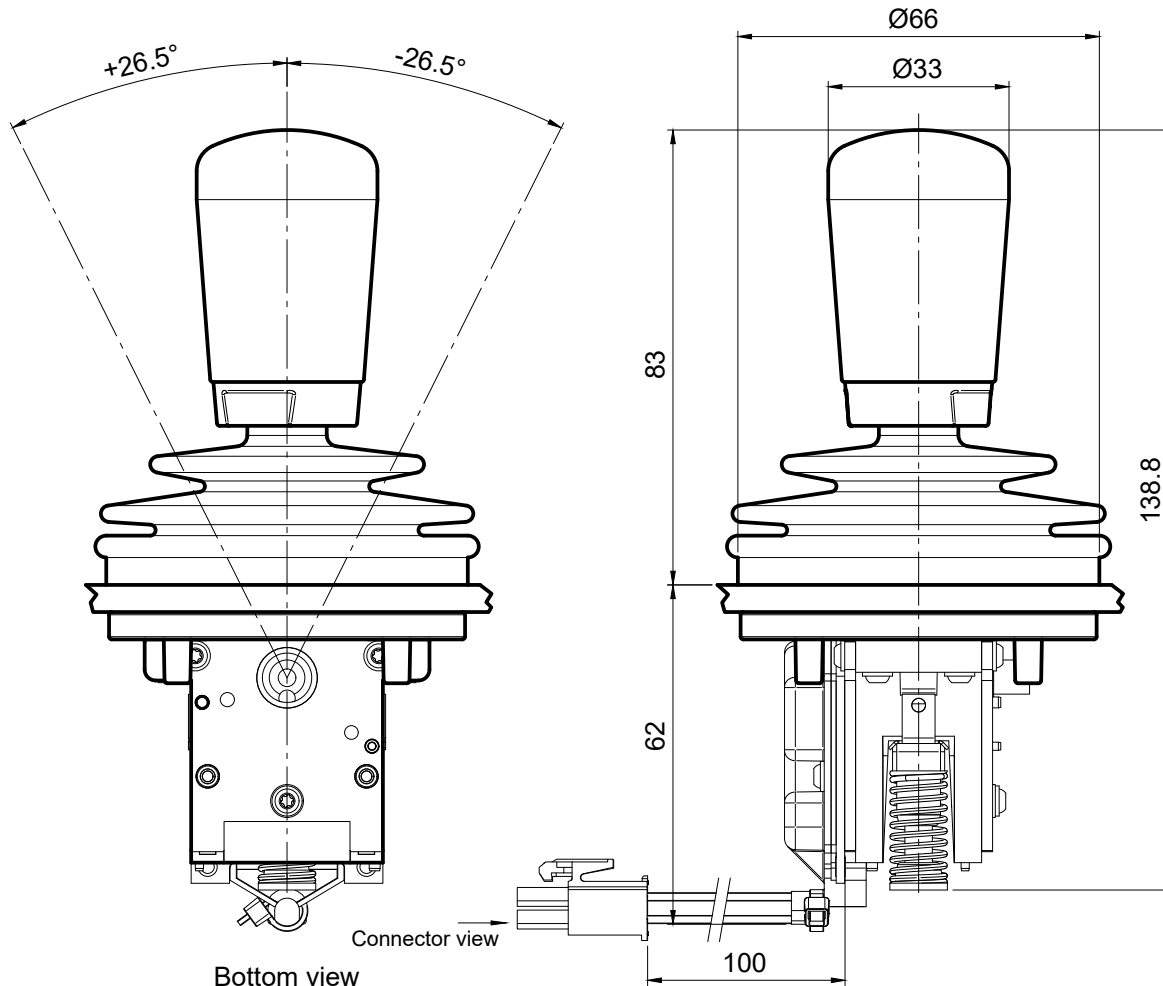
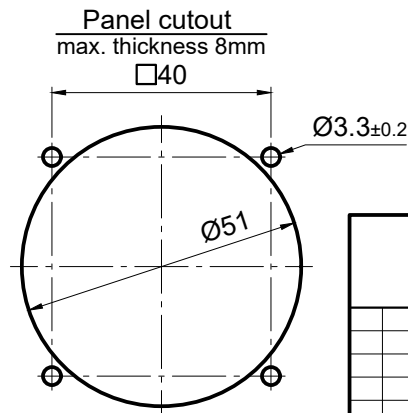


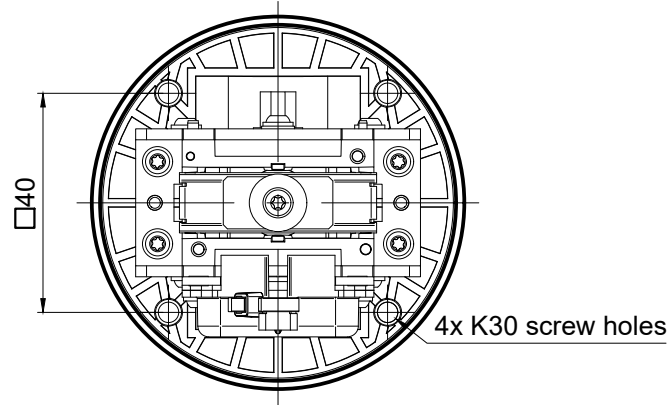


Bottom view

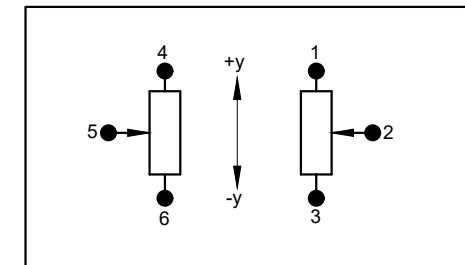

Description	
Joystick type SK 216-010	
Number of axes	1-axis
Operation by	Handle
Connector:	Mat N Lok Tyco 172339-1 (6-poles)
Retaining spring	normal, P/N: 216-147
Electrical characteristics	
Resistance value	track1 10 kOhm $\pm 20\%$ track2 8.5 kOhm $\pm 20\%$
Power dissipation	0.2 Watt at 40°C
Operating voltage	max. 30V DC

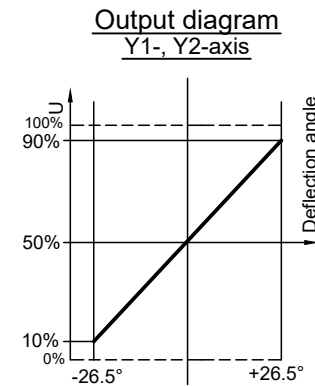

Connectors



								Maßstab 1:1		Position - Menge -		
								All dimensions in mm				
						Datum	Name	Joystick				
						Bearb. 10.03.21	Kiener M.					
						Gepr. 07.03.22	CH					
						Norm						
						Genge & Thoma AG joysticks & sensors				216-010a		Blatt -
a	AEN-24-002	27.03.24	MK	GJ								E
Idx	Änderungen	Datum	B'arb.	Gepr.	S:\Entwicklung\01 CAD-Daten\02 DWG\02 Dwg SK216\Typenzeichnungen\216-010a.dwg							