
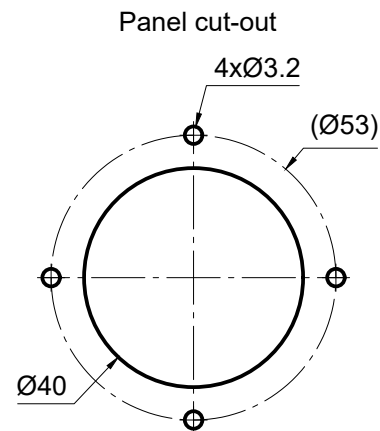
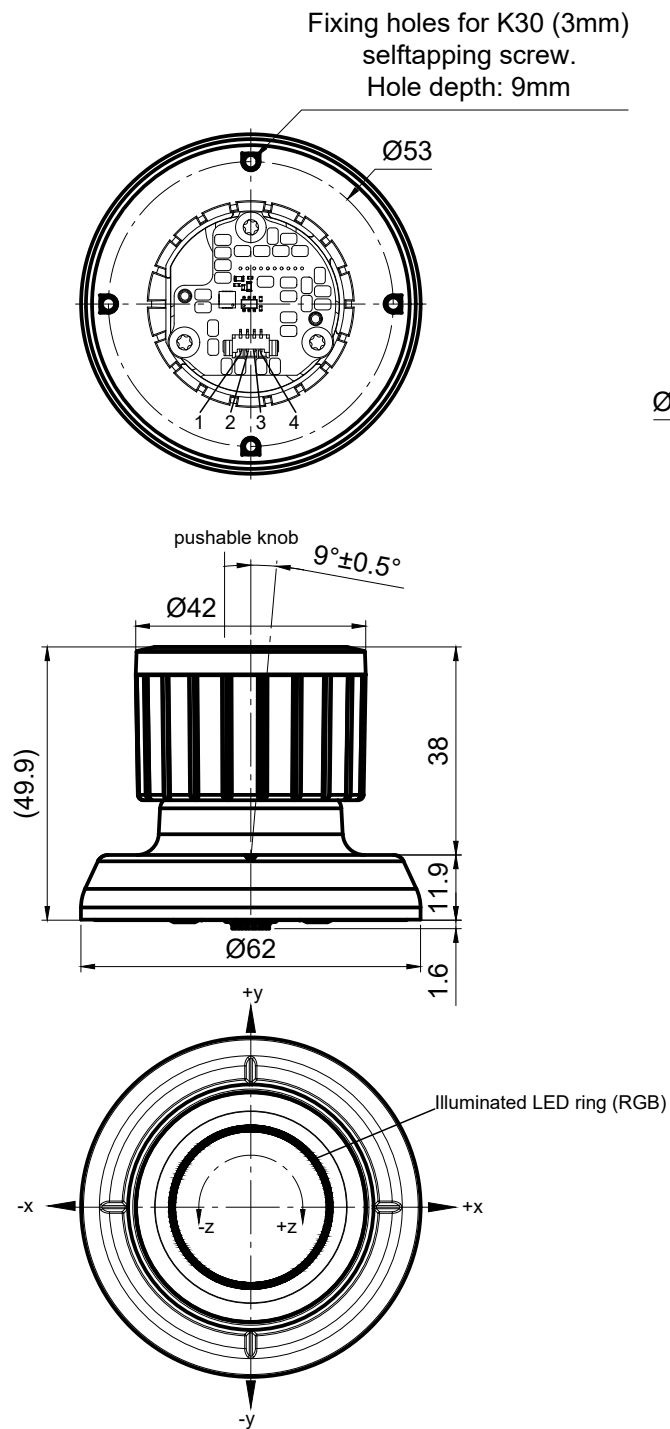


Description	
Jog-Dial type 225-013	
Number of axes	3-axes, x-, y-, z-axis
Operation by	knob with z-axis (fully rotatable)
Pushbutton	entire knob pushable (Travel: 0.5mm)
Cross guidance	none
Retaining spring	Strong, P/N: 200457
Detents	z-axis: 20 detents (18°)
Connector	Molex PicoBlade 4-pin
Electrical characteristics	
Operating voltage	3.3-5.0 V DC
max. voltage range	3.1-5.25 V DC
Sensor	Hall effect technology
Data communication	I ² C-bus
Connector pinout	
1	GND
2	SDA
3	SCL
4	VCC

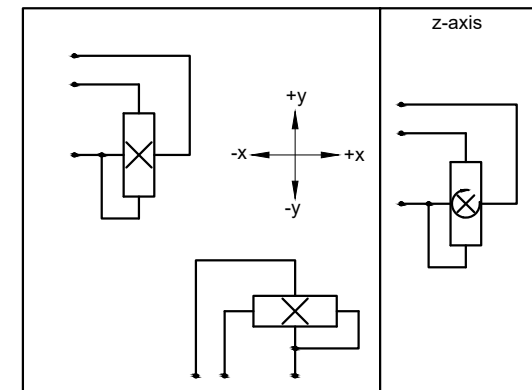

						Maßstab 1:1	Position -	Menge -
						All dimensions in mm		
						RCC		
						SK 225		
						225-013b		
						Blatt -		
						Bl		
b	Winkel von 5 auf 9°	21.11.23	GJ					
a	AEN-23-003	07.06.23	GJ					
Idx	Änderungen	Datum	B'arb.	Gepr.	S:\Entwicklung\01_CAD-Daten\02_DWG\DWG_SK225\Typenzeichnungen\225-013.dwg			