

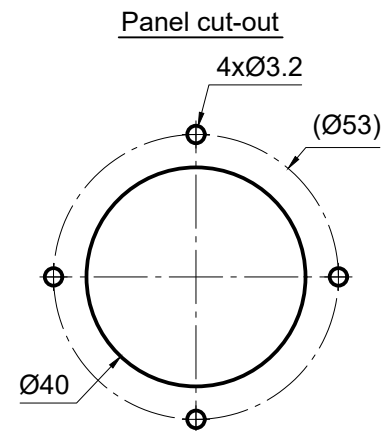
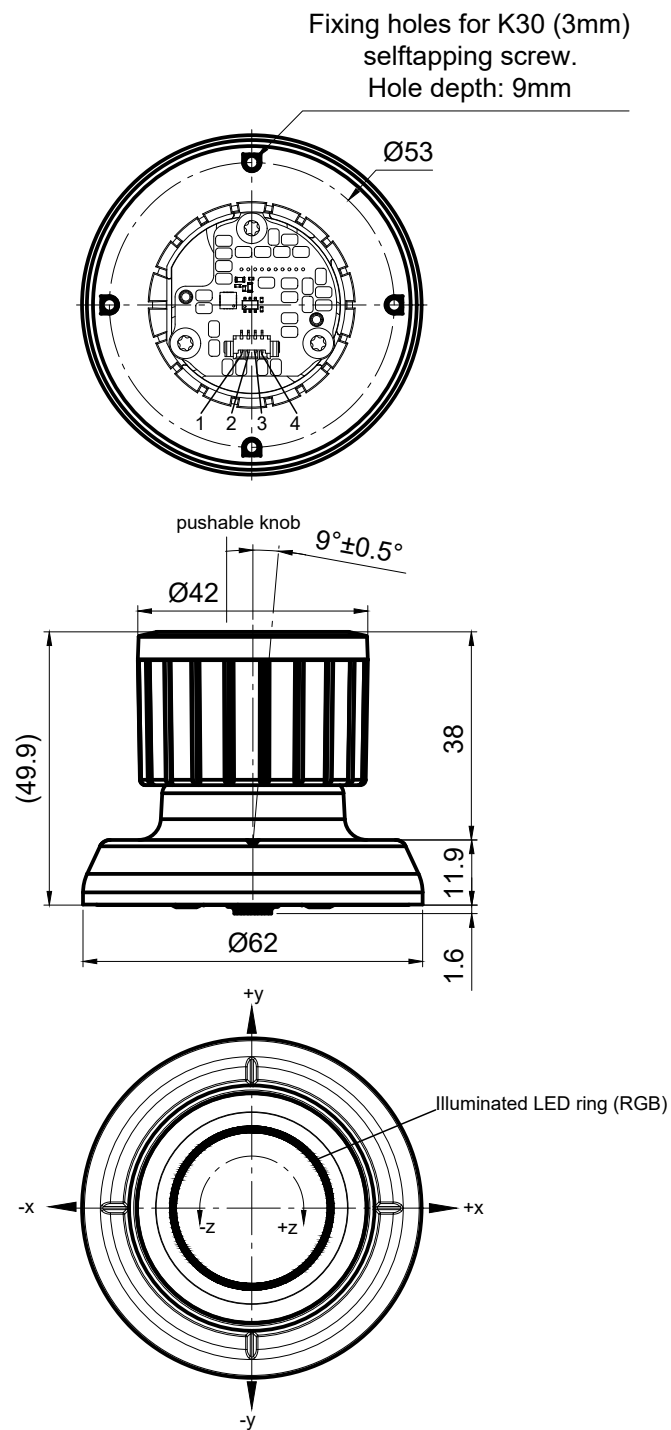


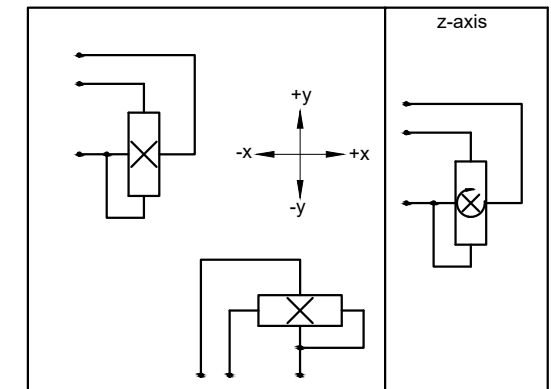

Description	
Jog-Dial type 225-023	
Number of axes	3-axes, x-, y (5° per side), z-axis
Operation by	knob with z-axis (fully rotatable)
Pushbutton	entire knob pushable (Travel: 0.5mm)
Cross guidance	none
Retaining spring	Strong, P/N: 200457
Detents	none
Connector	Molex PicoBlade 4-pin
Electrical characteristics	
Operating voltage	3.3-5.0 V DC
max. voltage range	3.1-5.25 V DC
Sensor	Hall effect technology
Data communication	I ² C-bus
Connector pinout	
1	GND
2	SDA
3	SCL
4	VCC



PRELIMINARY				Maßstab 1:1	Position -	Menge -
xx.xx.xxxx				All dimensions in mm		
				Datum	Name	
				Bearb. 09.03.20	Kiener M.	
				Gepr. 09.10.20	AG	
					joysticks + sensors	
					Erlenstrasse 32	
					CH-2555 Brüttig	
					Switzerland	
					+41 32 652 33 30	
					info@gtjoysticks.ch	
					www.gtjoysticks.ch	
					Blatt	
					-	
					Bl	
					225-023a	
					RCC	
					SK 225	
					All dimensions in mm	
					Maßstab 1:1	
					Position -	
					Menge -	
					Blatt	
					-	
					Bl	
					225-023a	
					RCC	
					SK 225	
					All dimensions in mm	
					Maßstab 1:1	
					Position -	
					Menge -	
					Blatt	
					-	
					Bl	