

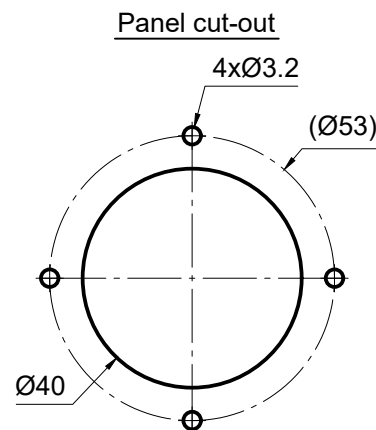


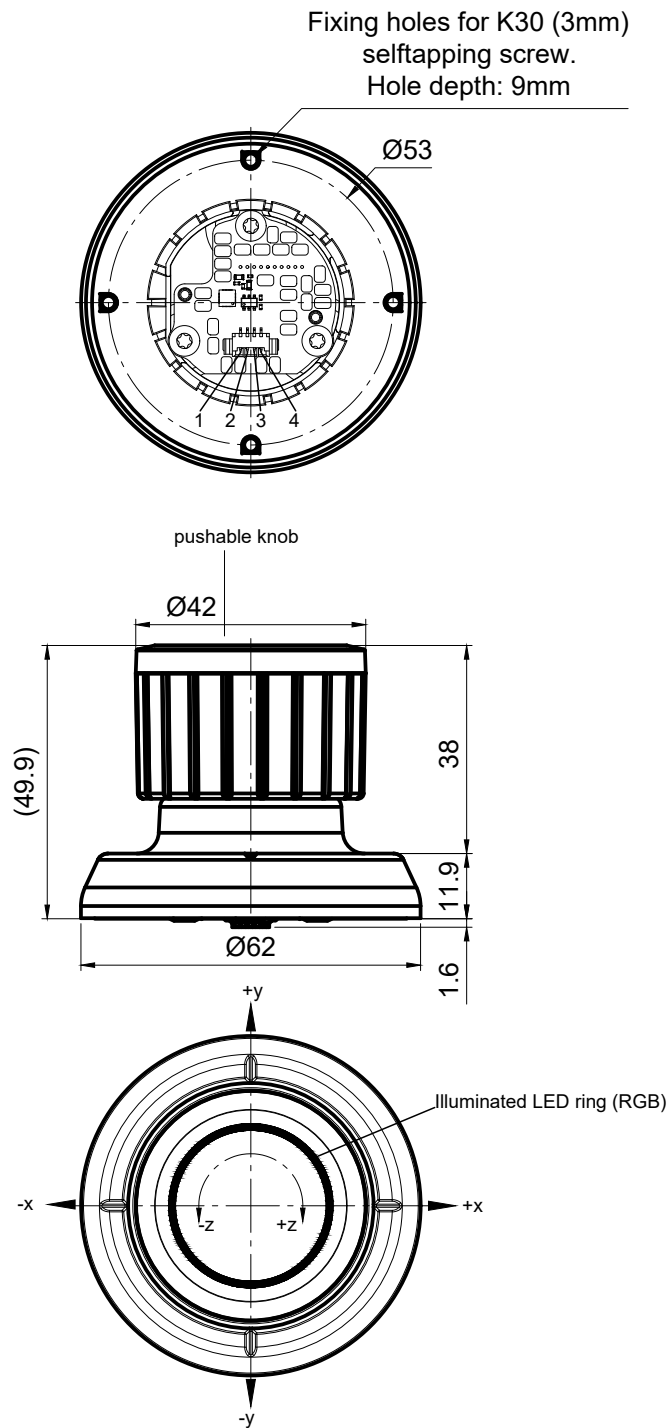

Description	
Jog-Dial type 225-024	
Number of axes	1-axis, z-axis
Operation by	knob with z-axis (fully rotatable)
Pushbutton	entire knob pushable (Travel: 0.5mm)
Cross guidance	none
Retaining spring	none
Detents	z-axis: 20 detents (18°)
Connector	Molex PicoBlade 4-pin
Electrical characteristics	
Operating voltage	3.3-5.0 V DC
max. voltage range	3.1-5.25 V DC
Sensor	Hall effect technology
Data communication	I ² C-bus
Connector pinout	
1	GND
2	SDA
3	SCL
4	VCC



PRELIMINARY

14.12.21



Maßstab 1:1		Position -	Menge -
All dimensions in mm			
RCC			
SK 225			
225-024			Blatt -



Idx Änderungen Datum B'arb. Gepr. S:\Entwicklung\01_CAD-Daten\02_DWG\DWG_SK225Typenzeichnungen\225-024.dwg