


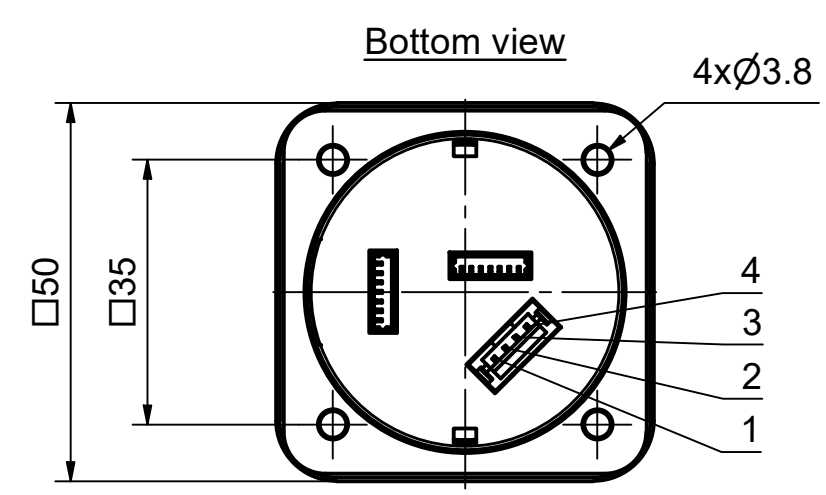


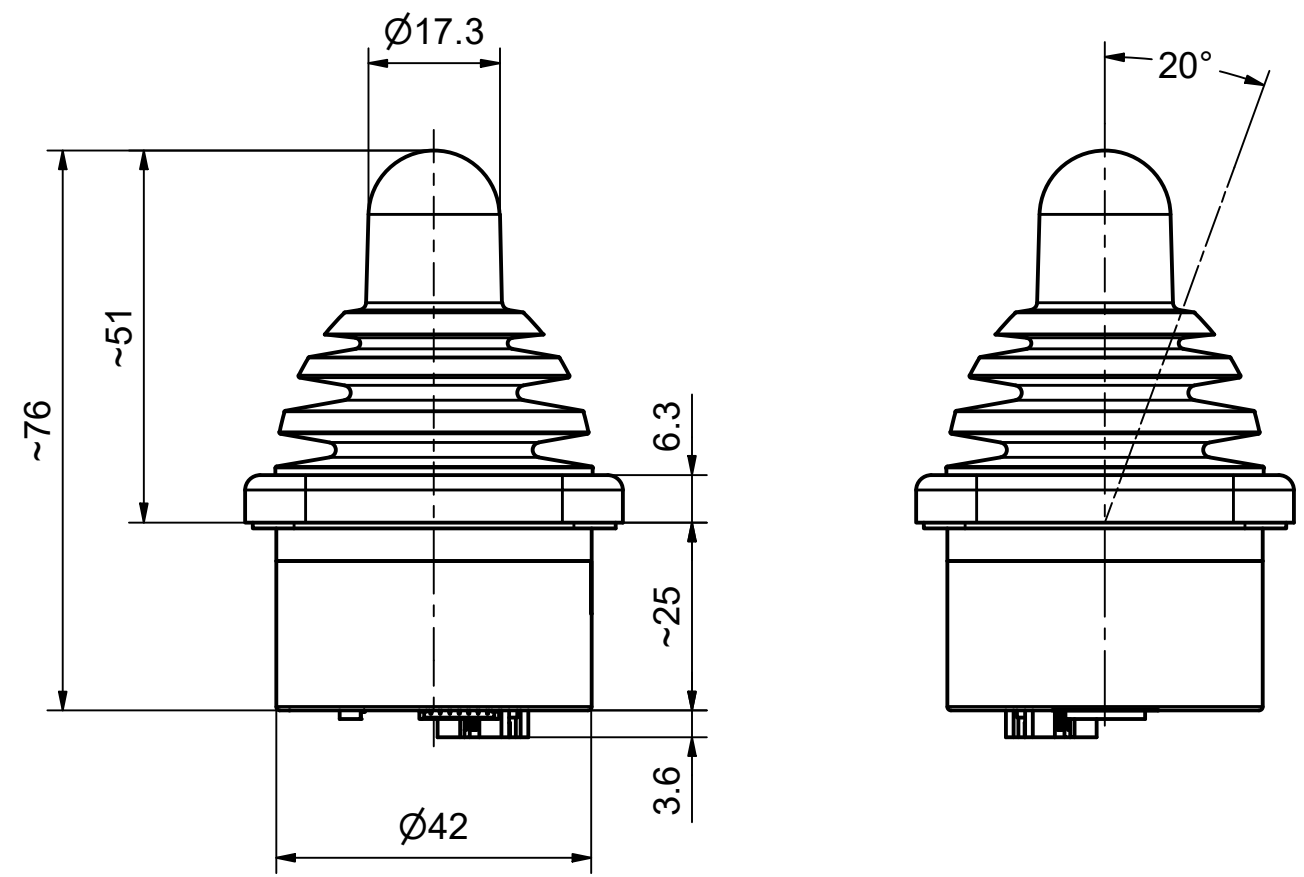

Description	
Joystick type SK 315-0192	
Number of axes	2-axes, x-axis, y-axis
Operation by	Rubber below
Cross guidance	soft
Retaining spring	normal, 60-112
Connector	JST-PH
	4 pin
Electrical characteristics	
Operating voltage	8-36 V DC
Sensor	Hall effect technology
Pin	
1	VCC
2	CAN_L
3	CAN_H
4	GND
Parameters	
Data communication	J1939
CAN ID	1
Baudrate	250 kbit/s

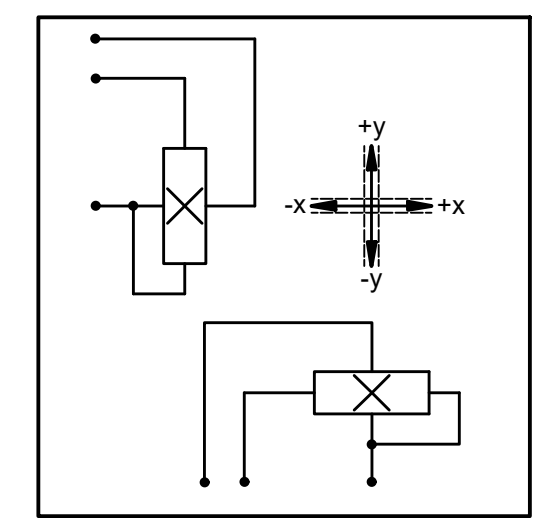

Preliminary				Oberfläche:			Masstab: 1:1	Position:	Menge:
23.06.25				Datum	Name		All dimensions in mm		
				Bearb.	23.06.25	jub	Joystick		
				Geprü.					
							SK 315		
							315-0192		
									Blatt
									1
									1
									Bl
Idx	Änderungen	Datum	B'arb.	Gepr.	S:\Entwicklung\01_CAD-Daten\01_AIDATA-GT\1_1_Joysticks\SK315\Zusammenstellungen\315-0192.idw				

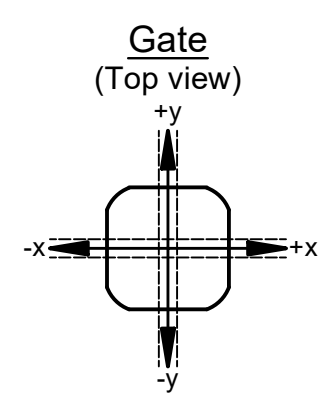

joysticks + sensors
Erlenstrasse 32
CH-2555 Brugg
Switzerland
+41 32 652 33 30
info@gtjoysticks.ch
www.gtjoysticks.ch