
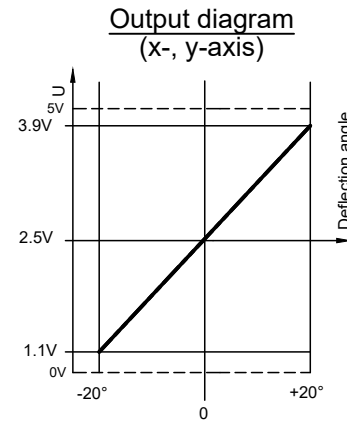

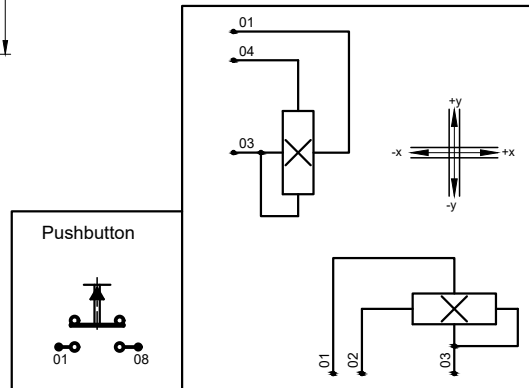
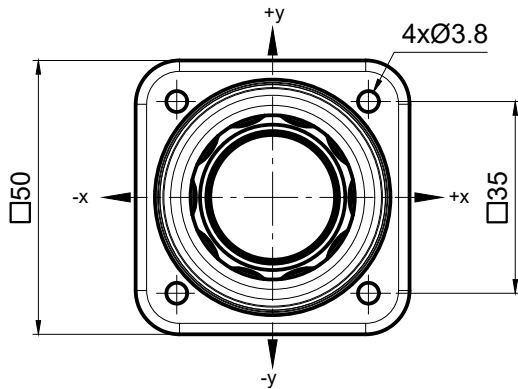
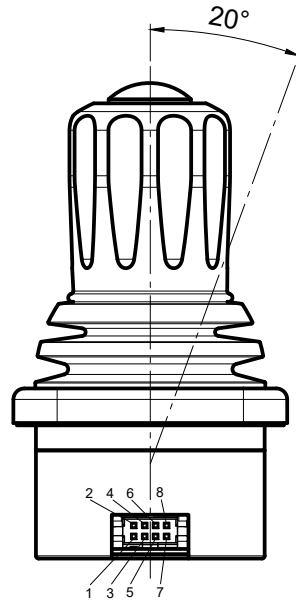


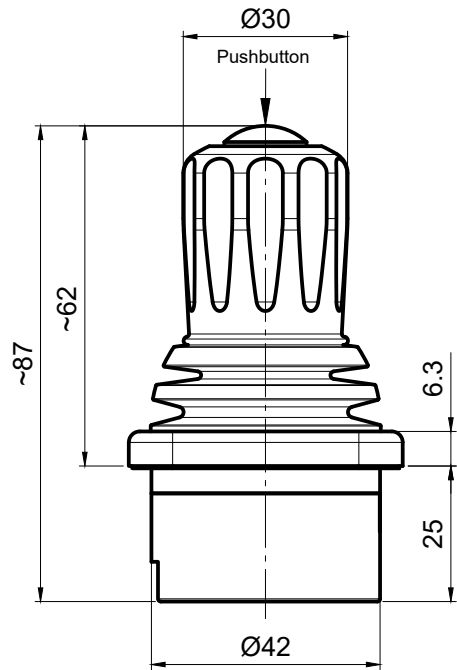

Description	
Joystick Type SK 315-0179	
Number of axes	2-axes, x-axis, y-axis both axes are redundant
Operation by	Handle with Pushbutton
Cross guidance	rigid
Retaining spring	normal, Z-Nr. 60-112
Connector	Minitex Shrouded Header 90°, 8-poles
Mating connector	Minitex IDC Receptacle, 8-poles
Electrical characteristics	
Operating voltage	5 V DC
Sensor	Hall Effect technology
Pin	
01	Supply voltage
02	x (-x=1.1V, middle=2.5V, +x=3.9V)
03	Ground
04	y (-y=1.1V, middle=2.5V, +y=3.9V)
05	do not use
06	do not use
07	do not use
08	Pushbutton output 5V

PRELIMINARY								Maßstab 1:1		Position - Menge -		
23.06.25								All dimensions in mm				
						Datum	Name	Joystick				
						Bearb.	23.06.25					jub
						Gepr.						
								315-0193				
								Blatt				
								-				
								Bl				
Idx	Änderungen		Datum	B'arb.	Gepr.	S:\Entwicklung\01_CAD-Daten\02_DWG\dwg_SK315\Typenzeichnungen\315-0193.dwg						