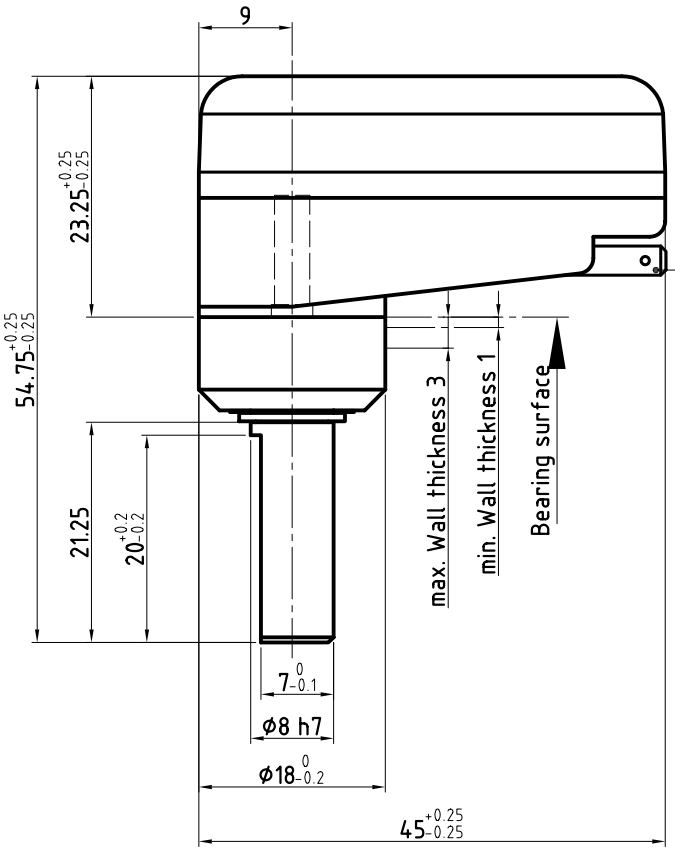

3 Quick disconnect terminals 2.8x0.8 mm
(Flat tab matching with flat receptacles of the fitting size)

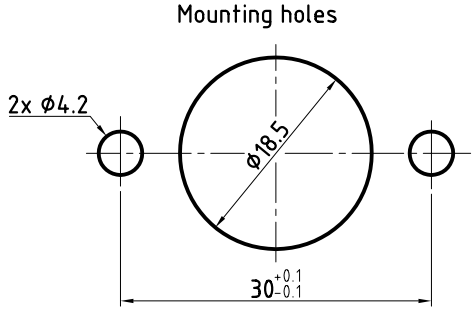

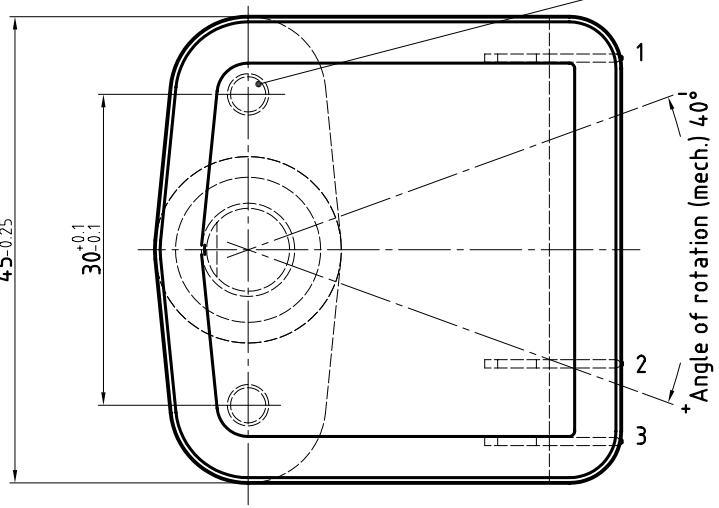

Caution!

Fixation should be made
with the delivered self furrowing
PT-screws WN1412 K 40,
length 12mm, Inox
max. penetrating depth: 7.5mm
Bossard Int. Inc. Std. BN 13579

Output voltage versus angle of rotation

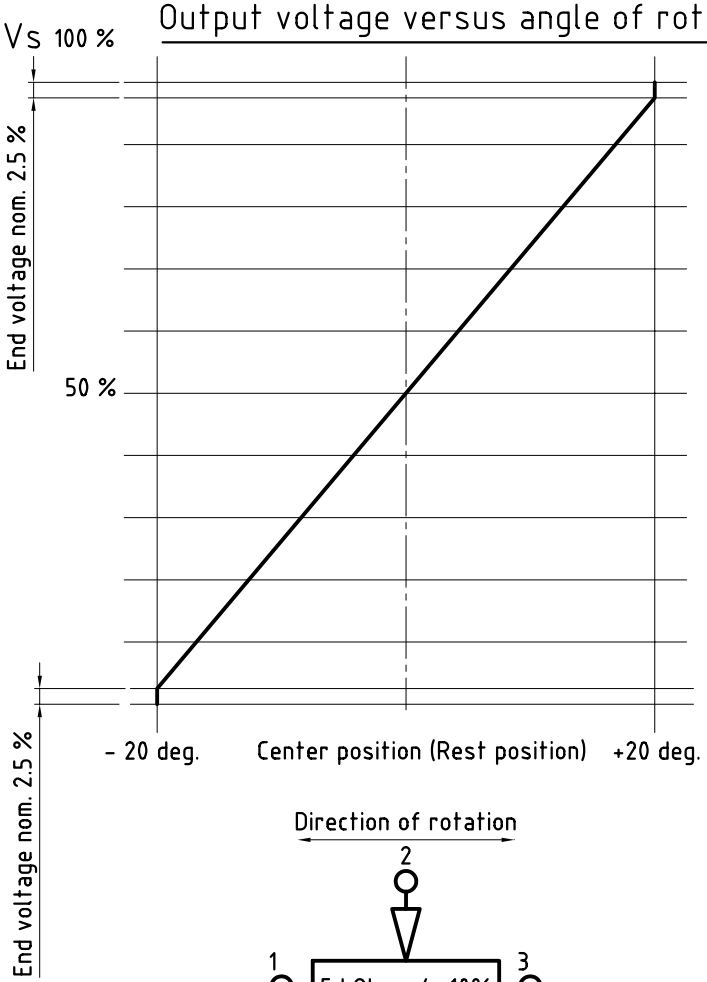



Metric dimensions

Ref.: Z.-Nr. 45-005 (6210)					Oberfläche	Maßstab 2:1	Position / Menge 1
						-	-
						-	-
					Datum	Name	
				Bearb.	12.05.98	Th	WP 45 CP
				Gepr.			Type drawing
				Norm			
c	Ua in Vs, 3.25 in 2.5%	19.01.00	TH	GENGE & THOMA AG CH-2543 Lengnau/Biel			45-005E c
b	Housing bottom side	22.12.98	TH				Blatt -
a	flat on shaft added	18.12.98	TH				Bl
Zust.	Änderung	Datum	Name	Dateiname D:\Dwg WP45\45-005.dwg			19.01.2000