


SK197 Series

Bottom mounted joystick

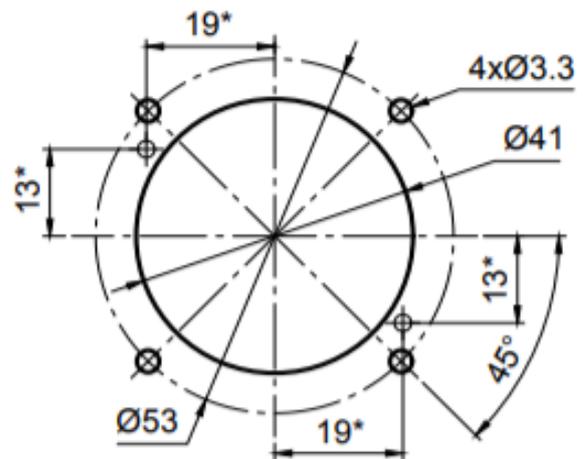

Exploded view of bottom mounted joystick

Customer's panel mounting cut-out:

*Pre-mounting holes: Optional possibility to pre-mount the joystick with two self tapping screws. Type of screw: WN 1423 K25 or similar self tapping screw (Ø2.5mm)

Hole dimension: Ø2,

Depth: 3.5mm

Max. torque: 0.35 Nm

IMPORTANT: screw length may not be longer than panel thickness + 3mm.

Example: for a panel thickness of 3mm, use 6mm screws.

M3 screws are required for mounting with a torque of 0.5 Nm and a thread locker like Loctite 222.

The screw length depends on panel thickness. All panel cut-outs should have a plane surface and should be free from unevenness or edges which could damage the rubber bellows. The surface quality and the assembly are important for the sealing and tightness. Without respecting these requirements GT Joysticks AG cannot give warranty.