
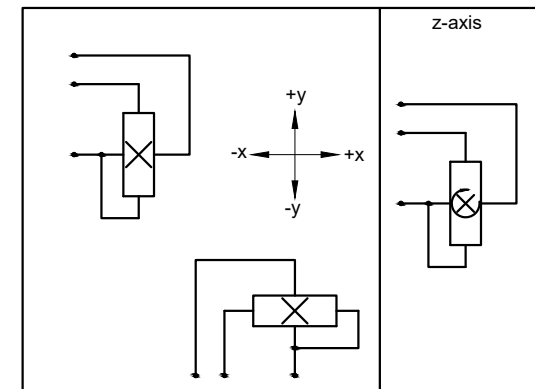

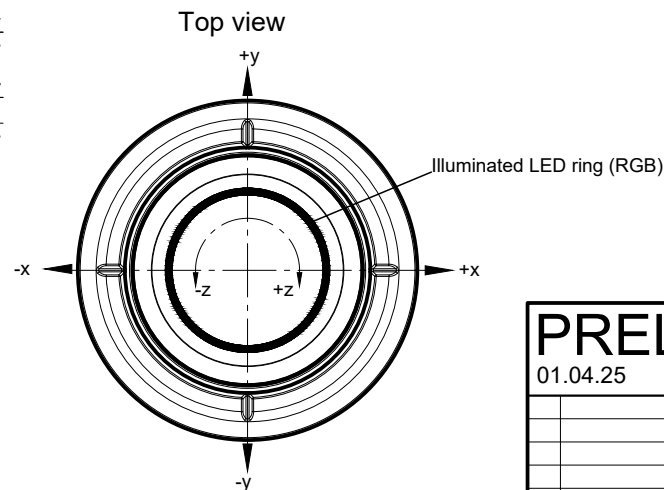
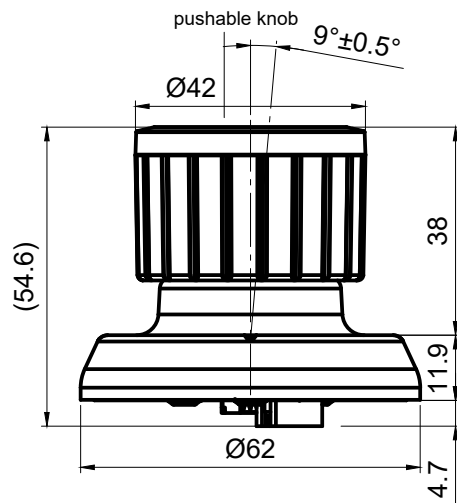
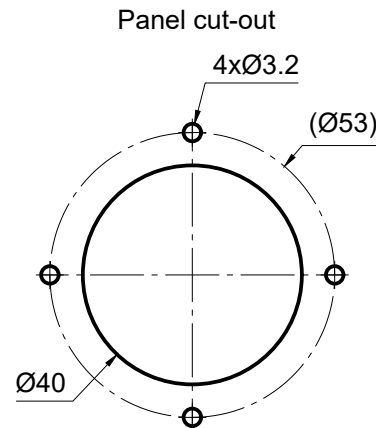


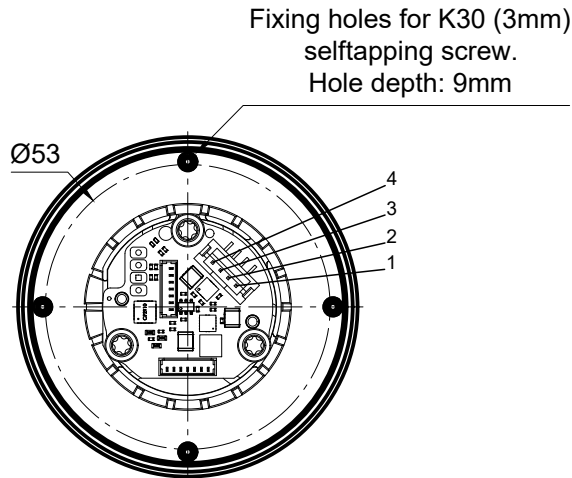

Description	
Jog-Dial type 225-033	
Number of axes	3-axes, x-, y-, z-axis
Operation by	knob with z-axis (fully rotatable)
Pushbutton	entire knob pushable (Travel: 0.5mm)
Cross guidance	none
Retaining spring	Strong, P/N: 200457
Detents	z-axis: 20 detents (18°)
Connector	JST-PH 4-pin
Electrical characteristics	
Operating voltage	8-36 V DC
max. voltage range	5-50 V DC
Sensor	Hall effect technology
Connector pinout	
1	VCC
2	CAN_L
3	CAN_H
4	GND
Parameters	
Data communication	CANopen - similar
CAN ID	84
Baudrate	500 kbits/s

PRELIMINARY 01.04.25							Maßstab 1:1 Position - Menge -				
					All dimensions in mm						
						Datum	Name				
						Bearb.	01.04.25	jub			
						Gepr.					
						 joysticks + sensors Erlenstrasse 32 CH-2555 Brugg Switzerland +41 32 652 33 30 info@gtjoysticks.ch www.gtjoysticks.ch					
						RCC SK 225					
						225-033					
						Blatt - E					
Idx	Änderungen	Datum	B'arb.	Gepr.	S:\Entwicklung\01 CAD-Daten\02 DWG\DWG_SK225\Typenzeichnungen\225-033.dwg						